



PolyLaser NW/ HP

Thermal or Photopolymer
Processor with Pre-Heat



- **Small Footprint**
- **Clean, Simple Design**

NW 26/33" - for Normal Production
HP 33/45/59" - for High Production

NW FEATURES

- Touch-screen display
- 50 mm diameter rubber rollers
- Adjustable transport speed (in seconds)
- Adjustable developer temperature
- Adjustable automatic replenishment + manual
- Adjustable anti-oxidation with periodic roller movement
- Automatic morning replenishment
- One brush in the pre-wash
- Two brushes in developer section
- One molleton roller in the wash section
- Developer tank low level alarm
- Adjustable gum time
- Developer filter
- Plate counter
- 20" pre-heat section

OPTIONS


- Developer chiller
- Developer tank auto fill
- Conductivity meter
- Interface board
- Input/Output tables
- Alarm for empty replenishment containers
- Gum section cleaning device
- Bellows pump for developer replenishment
- Modem for remote diagnostics
- Output sensor

HP FEATURES

- Touch-screen display
- Developer tank auto fill
- Developer chiller
- Bellows pump for developer replenishment
- 69 mm diameter rubber rollers
- Alarm for empty replenishment containers
- Adjustable transport speed (in seconds)
- Adjustable developer temperature
- Adjustable automatic replenishment + manual
- Adjustable anti-oxidation with periodic roller movement
- Automatic morning replenishment
- One brush in the pre-wash
- Two brushes in developer section
- One brush in the wash section
- Developer tank low level alarm
- Adjustable gum time
- Developer filter
- Plate counter
- 25" pre-heat section

OPTIONS

- Conductivity meter
- Interface board
- Input/Output tables
- Gum section cleaning device
- Modem for remote diagnostics
- Output sensor

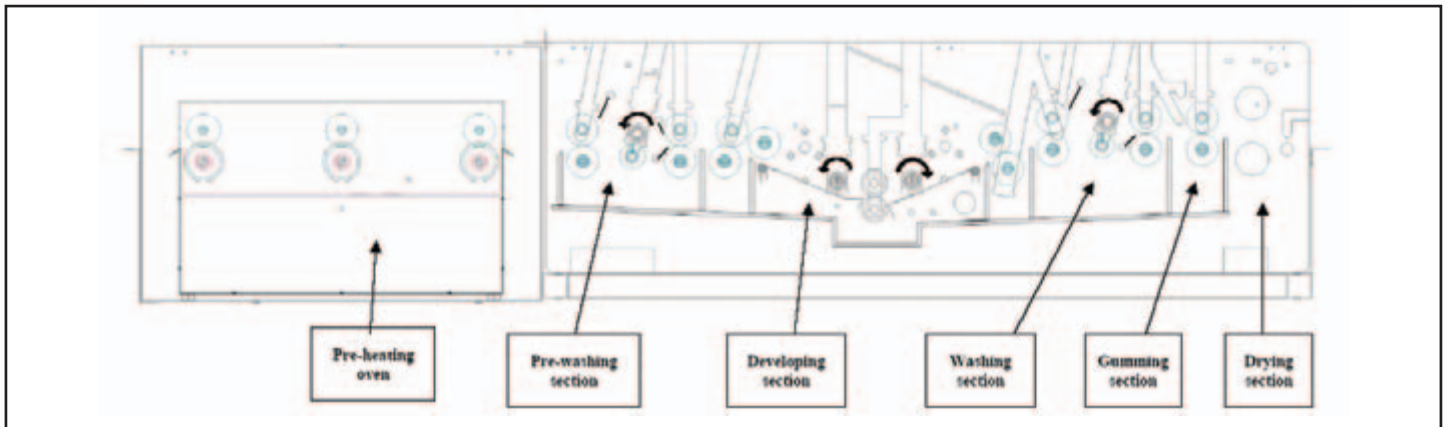

TECHNICAL SPECIFICATIONS

DESCRIPTION	NW 26	NW 33	HP 33	HP 45	HP 59
Maximum Plate Width	26"	33"	33"	45"	59"
Minimum Plate Length	12.6"	12.6"	12.6"	12.6"	12.6"
Plate Thickness	.12/.30 mm	.12/.30 mm	.12/.50 mm	.12/.50 mm	.12/.50 mm
Pre-Heat Temp	158/284	158/284	158/284	158/284	158/284
Developer Tank Capacity	7.75 Gal	9.25 Gal	11.5 Gal	15 Gal	19 Gal
Water Connection	3/4"	3/4"	3/4"	3/4"	3/4"
Drain Pipe	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"
Net Weight	1056 lbs.	1254 lbs.	1452 lbs.	1408 lbs.	1672 lbs.
Electrical Supply	230 3-Phase	230 3-Phase	230 3-Phase	230 3-Phase	230 3-Phase
Power Consumption	23 Amp	23 Amp	23 Amp	26 Amp	30 Amp
Cycle	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz

